




ULD840

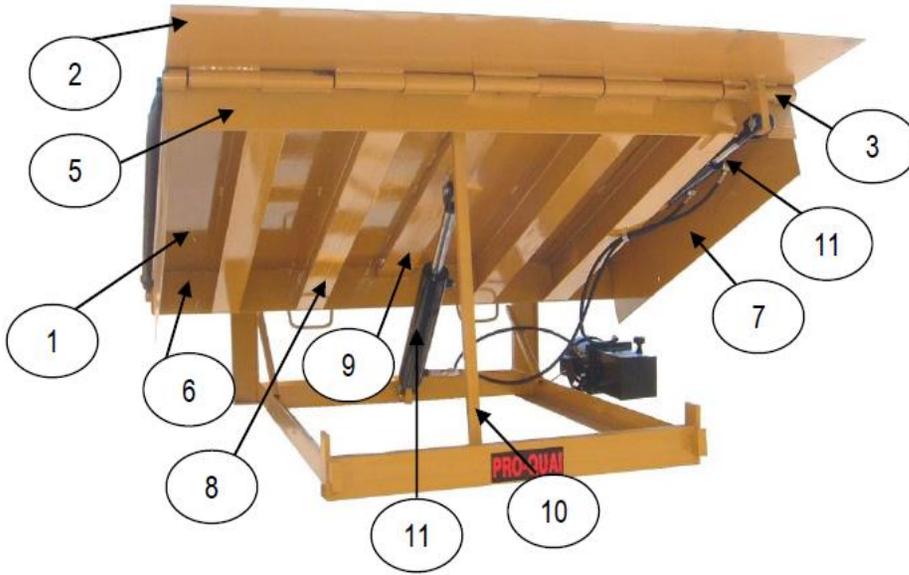

Technical Specifications

1. Top plate: checker plate 1/4"
2. Standard lip: checker plate 5/8" x 16"
3. Front piano hinge of 2 3/8" & 1 1/4" shaft
4. Rear piano hinge of 1 5/8" & 1" shaft
5. Front support flat bar: 6"
6. Rear support flat bar: 6"
7. Standard fixed toe guard
8. 6 H-Beam 6"@9.00 lbs/ft
9. 5" central channel
10. Standard maintenance stand
11. 1 Principal cylinder with anti-drop valve
1 Double action cylinder on the lip
12. Dimension : 6' x 8'
13. Dynamic load of 40 000 lbs

Distributor's informations

Name :

Phone :

Address :

Options

Voltage : Quantity :

Customer's informations

Name :

Phone :

Address :

Project Name :

Signature :


ULD840

Nominal pit size			
Width	Length	Front height	Rear Height
6'	8'	20"	19,5"
1828 mm	2438 mm	508 mm	495 mm
Actual pit size			
Width	Length	Front height	Rear height
73"	87"	20"	19,5"
1854 mm	2209 mm	508 mm	495 mm
Curb angles dimensions			
Front width	79"	2600 mm	
Rear width	79"	2600 mm	
Length	84"	2133 mm	
Height	20"	508 mm	

When there is a downward slope towards the building, the dock leveler and the bumpers will be installed projecting outwards according to the slope's percentage.

Slope's %	Concrete's projection*	
2%	2 1/2"	64 mm
4%	6"	127 mm
6%	7 1/2"	191 mm
8%	10"	254 mm

Projection calculated from the back of the door seal

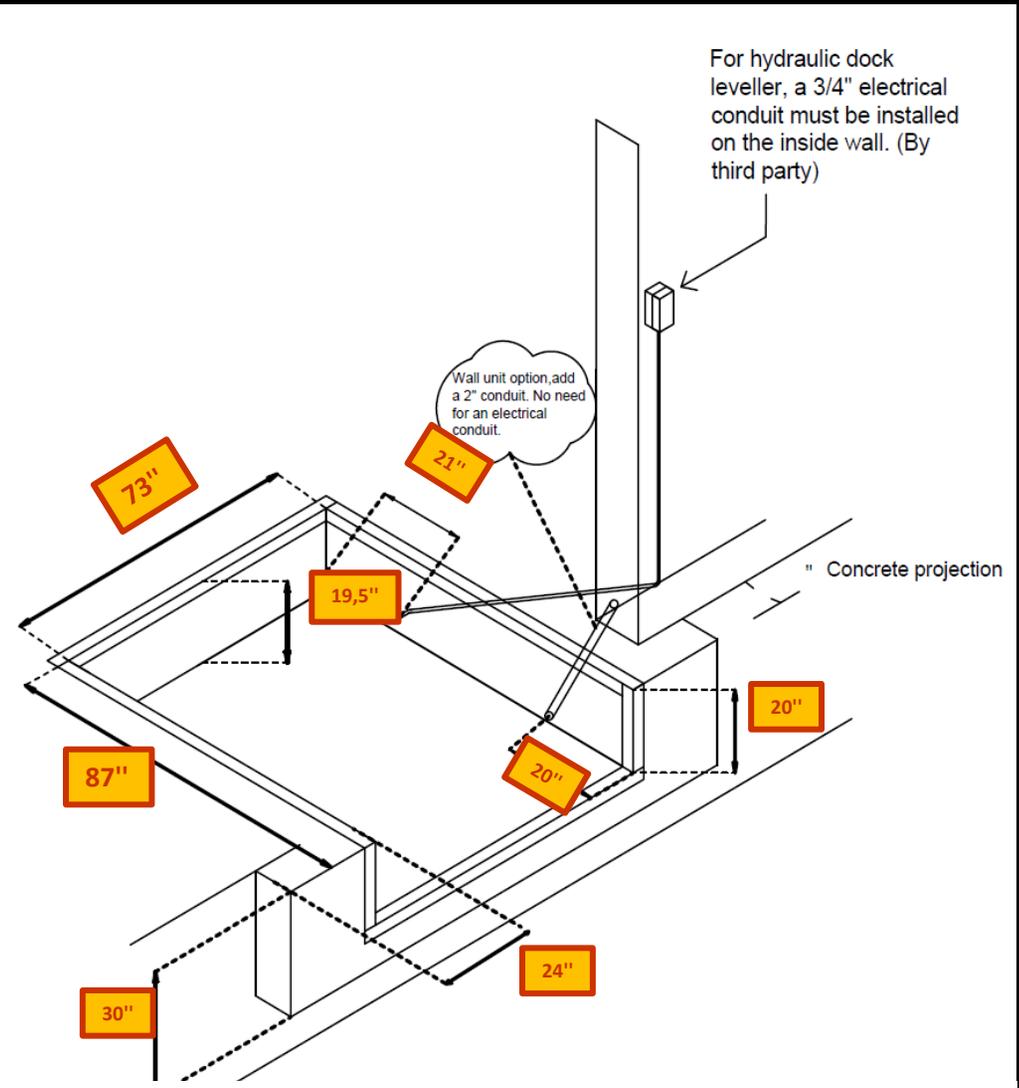

**If truck retrain, make concrete projection until footing.